

AT KESWICK



Stage 52
Architectural Design Guidelines

May 2024

TABLE OF CONTENTS

1 INTRODUCTION	1
1.1 OBJECTIVES	1
1.2 LAND USE AND ZONING REGULATIONS	2
1.3 GENERAL RULES AND LIMITATIONS	2
1.3.1 General	2
1.3.2 Inspections	2
1.3.3 Restrictive Covenant	
2 ARCHITECTURAL DESIGN	3
2.1 PROPOSED HOUSING PRODUCT	3
MODERN PRAIRIE	5
WEST COAST CONTEMPORARY	6
NORDIC 7	
MODERN FARMHOUSE	8
	g
(30.00.7)	
3 SITE PLANNING	10
3.2 HOUSE PLACEMENT & WIDTH	10
3.3 SETBACKS	10
3.3.1 Front Setback	
3.3.2 Driveways	11
3.4 GRADING	11
3.5 RETAINING WALLS	11
4 0515041 050110545155	4.0
·	12
	12
- · · · · · · · · · · · · · · · · · · ·	
4.1.2 3 rd Storey Development	
4.2 GARAGES	13
4.2.1 Front Drive Product	
4.1.1 Triple Car Garages (Front Facing)	14
4.1.1 Side Drive Configuration	

4.2	REPETITION	15
4.2.	1 Repetition and Colors	15
4.3	PARGING	16
4.4	SPECIAL DESIGN CONSIDERATION	16
4.4.	1 Corner Lots	16
4.4.2	2 High Exposure Rear and Walk-out Lots	17
4.4.3	3 Medium Exposure	17
4.4.4	4 Exterior Decks	18
5 DES	SIGN ELEMENTS	18
5.1	ROOF DESIGN & PITCH	18
5.2	FRONT ENTRIES	19
5.2.	1 Porches, Front Steps, and Risers	19
5.2.2	2 Front Doors	19
5.3	RAILING	20
5.4	COLUMNS	20
5.5	WINDOWS	20
5.6	PROJECTIONS/CHIMNEYS	21
5.7	GARAGE DOORS	21
6 MA	ATERIALS & COLOURS	21
6.1	MATERIALS	21
6.1.3	1 Primary Wall Materials	21
6.1.2	2 Secondary Wall Materials	22
6.2	MASONRY	22
6.3	TRIM, FASCIA, AND SOFFIT	22
6.3	BUTTRESS WALLS	23
6.4	COLOURS	23
7 ADI	DITIONAL REQUIREMENTS	24
7.1	SHOWHOMES	24
7.2	SUBDIVISION APPEARANCE	24
7.2.	1 Signage	24
7.2.2	2 Excavation Material	24
7.2.3	3 Clean Up	24
7.2.4	4 Satellite Dishes and Recreational Vehicles	24

8	LAN	DSCAPING	24
:	8.1	GENERAL REQUIREMENTS	25
:	8.2	DESIGN REQUIREMENTS	25
:	8.3	MINIMUM REQUIREMENTS	26
	8.3.1	Minimum Plant Sizes and Ratio	26
:	8.4 FEN	CING	27
	8.4.1	Requirements, Typical Lots	27
	8.4.1	Requirements for Amenity Lots	28
9	PROCE	SS OF APPROVAL/CONSTRUCTION	29
9	9.1 REV	IEW	29
9	9.2 SUB	MISSION PROCESS	29
9	9.3 SITE	CHECK	30
9	9.4 APP	ROVAL SERVICES	30
	9.4.1	Portfolio Review	30
	9.4.2	Pre-Approval	30
	9.4.3	Final Approval	31
	9.4.4	Final Approval (Without Preliminary)	32
	9.4.5	Revisions	32
9	9.5	BUILDING PERMIT	32
9	9.6	SURVEYOR STAKEOUT	32
9	9.7	FINAL LOT INSPECTION	32
	9.7.1	Lot Inspection Submission Requirements	33
	9.7.2	Architectural and Landscaping Inspection Submission Requirements	33
9	9.8	RETURN OF DEPOSITS	34
DII	RECTOR	Y	34
Та	ble of F	igures	
Fig	gure 1: l	andscaping Design Requirements (All Lots and by lot type)	23
Fig	gure 2: F	encing Plan – Typical Lots	27
		Fencing Plan – Stormwater Management Facility	28
Fig	gure 4: F	Fencing Plan – 3-Storey, Rear-Attached Product	29
ΑP	PENDIX	A: Recommended Native Plants	35
ΑP	PENDIX	B: Fence Details	37
ΔР	PENDIX	C. High Visibility Man	39

1 INTRODUCTION

Riverstead at Keswick

Building off the success of the early phases in Riverstead, Cantiro is proud to welcome you to the next stage in development in Riverstead. Stage 52 will feature premium amenity lots which are designed in proximity to enchanting trails, ravines and green spaces that are tucked next to the majestic North Saskatchewan River. To meet the unique and sought after location, Stage 52 will feature estate and semi-estate single family products with elevated standards to match the unique and premium location. The elevated architectural design will come with increased design flexibility to meet the needs of the discerning Alberta homebuyer and their design teams. In addition to the current styles – Modern Prairie, West Coast Contemporary, and Nordic – amenity lots will introduce contemporary renditions of Farmhouse and Craftsman to provide interesting and cohesive streetscapes of varied architectural styles, that remain distinctive and uniquely unified. In all cases, diversity, originality, and individual expression are encouraged and homes designed outside of these preferred styles may be approved based on the merits of the design. Collectively, these architectural styles will provide a distinctive streetscape and ample opportunity for the creative expression that defines the architecture of Riverstead.



1.1 OBJECTIVES

The architectural guidelines for Riverstead Phase 52 will build off of the success of the community and maintain the integrity of the community for years to come. The objectives are to promote a high level of architectural detail, ensure appropriate building form, promote landscaping features that enhance the environment, and certify awareness of community sustainability. Text, illustration, photos, and models are intended to provide guidance to those participating in the design and





construction process; however, they are not always absolute or prescriptive, and they encourage design creativity and diversity within a range of architectural styles.

1.2 LAND USE AND ZONING REGULATIONS

Stage 52 is zoned Small Scale Flex Residential which provides for a range of dwelling types and densities. Due to the variety of land use and zoning requirements, all builders are to ensure familiarity with the appropriate requirements and stipulations.

1.3 GENERAL RULES AND LIMITATIONS

1.3.1 General

These requirements may be altered, amended, or varied by the Vendor, Cantiro, at its sole and absolute discretion and without prior notice. Cantiro and their designated consultants retain the full discretion to approve or disapprove any or all elements of a proposed development or structure. It is strongly recommended that all purchasers or builders obtain pre-approval for any proposed development. All Purchasers/Builders are advised to review this document in its entirety prior to completing any work on the lands.

The Vendor, the Architectural Consultant, their servants, agents, contractors, appointees, shall not be held responsible or liable for the accuracy, enforcement or compliance with these Landscape and Design Requirements to any Owner, Purchaser and/or Builder within the subdivision.

Formal standards for development will be those as established in the City of Edmonton Land Use Bylaw, specific to Riverstead. Conformity with these requirements does not supersede the required approval process of the City of Edmonton.

It is not the purpose of this process to check for compliance with applicable governing statutes and requirements. Incomplete submissions may be returned without review. Any changes to approved plans must be approved in writing prior to implementation.

1.3.2 Inspections

Each Builder/Purchaser Owner is responsible for inspecting the condition of curbs, sidewalks, streetlights, services, etc. on his lot and must submit written notice of any damages to the Developer within 7 days of purchasing the lot, otherwise cost for repairing any damages becomes the sole responsibility of the Purchaser.

1.3.3 Restrictive Covenant

Restrictive covenants(s) with these Architectural Guidelines are registered on the title of each lot.

2 ARCHITECTURAL DESIGN

Stage 52 of the Riverstead will feature a blend of estate level product that backs directly onto a network of trails and ponds that are designed into the amenity offering of the community. It will also include the elevated large pocket lots which will have standards that are applied in continuation from the previous stages. The design goals for these homes are to incorporate a level of design that showcases the quality of the built environment to complement and encircles the premier amenity of Riverstead. To maintain and ensure the progressive character and richness of the streetscapes in Riverstead, modern features and detailing are highly encouraged to be incorporated into the exterior design of all chosen architectural styles.













2.1 PROPOSED HOUSING PRODUCT

The single-family housing product proposed throughout Phase 52 in Riverstead will feature a range of higher-end housing as it transitions towards the river valley. Options will include (and be identified as):

- (V1) Single family front attached double car.
 - Composite siding on all exposed elevations, upgraded secondary materials (according to style) on all houses. Vinyl permitted ONLY as a colour match on non-exposed sides and rears. Not permitted as a secondary material.
 - Visibility Requirements A mix of high visibility and moderate visibility depending on lot grading.
 - Minimum landscaping requirements as established by the City of Edmonton.
- (V2) Semi-Estate will feature a mix of front-facing double and triple car configurations.





- Form and massing to adhere to standards for the community. Garage integration controls related to ratio and distance to the porch are to be strictly enforced. Minimum width required at the front.
- Composite siding on all four elevations (with limited exceptions on interior lots), upgraded secondary materials (according to style) on all houses.
- Masonry is required for all styles on the front elevation.
- Visibility Requirements A mix of high visibility and moderate visibility depending on lot grading. – increased material and finishing standards on high visibility and walk-out decks that back onto the lake.
- Minimum landscaping requirements as established by the City of Edmonton.

(V3) Estate Front attached triple car and side drive configurations.

- Estate level form, massing, and details. House is to fill the pocket width, but standards evaluated with any eye towards to overall building form and volume.
- Composite siding on all elevations, upgraded secondary materials (according to style) on all elevations.
- Masonry requirements on all housing types and products. Min 150sq m on the front elevation, required on all exposed rears.
- ➤ High Visibility Requirements increased material and finishing standards on high visibility and walk-out decks that back onto the lake.
- ➤ Upgraded landscaping requirements additional landscaping requirements required in the rear yard. Builders will be required to submit landscaping plans for review specific to lots backing onto the lake.



2.3 ARCHITECTURAL STYLES

MODERN PRAIRIE

Prairie style houses integrate traditional horizontal lines and low slope hip roofs with large expanses of glass and clean modern detailing. Modern takes on this classic style incorporate new materiality, asymmetrical applications of material and detailing, and large expansive glazing in a wide variety of configurations.

FORM AND MASSING

- Understated massing with horizontal emphasis in form.
- Profile is low and grounded with recessed upper floors and variations in wall plane.
- Low-pitched hipped rooflines (Min. 4/12) with wide eave overhangs (Min. 24" when permitted).
- Flat-roof accents are encouraged in contemporary approaches.
- Recessed and covered entries defined by large, structural columns.

MATERIALS AND COLORS

- Clad in siding/stucco in horizontal application.
- Premium secondary materials include style-suited brick/masonry, panels, accented stucco or composite siding, and metal/wood grain siding accents.
- Materials applied in a variety of configurations (asymmetrical is encouraged).
- Dark earth tones preferred. Monochromatic/tonal color schemes are acceptable.
- Masonry base only Style-suited brick and structured/ashlar masonry profiles are preferred.
 Floating masonry is not acceptable.

- Simple trims, horizontal battens or brickmoulds.
- Large heavy columns accented with stone, brick, or other suitable material.
- Large heavy angular braces.
- Repetitive window patterns (classic).
- Expansive glazing with unusual exterior grill patterns and configurations (contemporary).
- Flat panel garage doors with symmetrical or asymmetrical glazing.
- Metal and concrete finishes (railing, entry, and risers).









WEST COAST CONTEMPORARY

The West Coast Contemporary home is characterized by low sloping hip and single-sloped roofs with broad overhangs and horizontal proportions. Homes can be minimalistic with controlled roof pitches, clean lines, or bold forms with exaggerated shed roofs.

FORM AND MASSING

- Well-articulated façade with variation in roof lines and wall plane.
- Mix of flat and single-sloped roof lines are acceptable as accents or as the main roof lines. Shed roof and barreled roofs can also be included in the roof design.
- Short to medium overhangs (12"-18") Eave overhangs can be extended to the front.
- Large porches flat roof accents/entries.
- Solid vertical massing and projections

MATERIALS AND COLOURS

- Home is clad in siding/stucco with stone applied to whole masses or as a base.
- Premium secondary materi3als include corrugated metal, industrial panels, brick/masonry, and wood tone products. Smooth wall finishes are preferred.
- Smooth masonry finishes, profiles suited are stacked or block profiles, brick recommended.
- Board and batten material to be monochromatic (or tonal)
- Dark, bold color profiles are preferred with well executed accent colors.

- Vertical projections fully clad in wood grain finish, smooth brick, or smooth finish panels.
- Clean trim detailing or no trims, black window frames.
- Large expansive glazing. Asymmetrical configurations are encouraged.
- Simple, straight columns finished in solid material (timber, fiber cement, masonry)
- Natural wood finishes Exposed wood beams and wood tones accents .
- Modern Style entry and garage doors, glazing panels in unique configurations are preferred.
- Thickened fascia 8" minimum on the primary rooflines. Larger fascia will be encouraged.



NORDIC

Nordic inspired homes take simple lines, familiar stacked two-storey forms, and steep pitched gables rooflines and seek to achieve a minimalist, clean approach to the exterior design – without sacrificing beauty. The exterior of this style will include strong natural wood influences in either siding or feature elements and subdued, monochromatic colour schemes.

FORM AND MASSING

- Stacked, two-storey forms.
- Subtle projections on wall faces to seek defined transitions of materials.
- Steep-pitched gable rooflines (Min. 8/12) with varied eave overhangs flush on the sides and exaggerated towards the front is best suited for this style.
- Monochromatic buttress wall buildouts to exaggerate the simplistic forms. Removal of overhangs to simplify overall form is also acceptable and encouraged.
- Recessed and covered entries, full front porches, flat roof accents.

MATERIALS AND COLOURS

- Siding and accent materials applied primarily in vertical profile covering whole masses.
- Premium secondary materials masonry and brick, wood grain siding, vertical composite siding, straight-edge shakes.
- Colours suited to the Scandinavian style are subdued, monochromatic palettes with well executed accent colors (wood grain).
- Masonry base only Style-suited brick and masonry profiles.

- Asymmetrical detailing off-centered windows and material application.
- Protruded buttress walls will often form the outline of sections of the house and upper gable –
 these are to be consistent in material and finish (review section 6.3 for details).
- Simple trims or brickmoulds black window frames are required for this style.
- Simple columns accented with timber, wood grain, masonry.
- Expansive glazing with unusual exterior grill patterns and overall configuration.
- Flat panel garage doors with glazing, wood accents are encouraged.
- Metal and concrete finishes (railing, entry, and risers).









MODERN FARMHOUSE

The Modern Farmhouse style evolved from the massing and form derived from the country living style that was born out of necessity on the prairies and has been updated with clean, modern features and design elements. Varied materials and textures combined with neutral, monochromatic color palettes are common with the modern interpretation of this style.

FORM AND MASSING

- Multiple gables, exposed rafters.
- Simple stacked massing, two-storey forms.
- Steep pitch gable rooflines (min 8:12) with dormers and/or low-pitched shed rooflines.
- Short to medium overhangs.
- Large porches and grounded verandah spaces, flat roof accents are encouraged.

MATERIALS AND COLORS

- Clad in composite siding/stucco with stone applied to whole masses or as a base.
- Stone profiles suited are Stacked Stone, Brick or Ledge stone in light, tonal colours.
- Premium secondary materials may include composite board and batten, composite or metal wood tone materials, or composite panels. Vertical applications are preferred.
- All board and batten material must be monochromatic (or tonal).
- Natural wood finishes, stained wood finishes, and wood grain metal tone.
- Farmhouse designs which feature entirely white facades (primary and secondary) will be discouraged.

- Shed roofs with metal roofing and brackets.
- Decorative gable vents
- Battens and trims will have a simple, straight profile.
- Large expanses of glazing in uniform, repetitive windows patterns.
- Black window frames are required with predominantly white or light colour schemes.
- Verandah spaces with simple 10"x10" columns and straight picket, glass or no railing.
- Steel or metal features such as beams, trellis', posts and brackets





MOUNTAIN CRAFTSMAN (Contemporary)

The Craftsman Style of Architecture, which evolved from the English Arts and Crafts movement. This home is characterized by lower pitched rooflines, articulated façades, and exude the qualities of hand craftsmanship and rustic materials. The Modern Craftsman homes honor the lines and forms of the Craftsman style but uses contemporary materials and techniques – utilizing timber, wood-stained finishes, and monochromatic/tonal color palettes.

FORM AND MASSING

- Massing reflects an articulated facade with variations in plane and rooflines.
- Hip or gabled roofs with inset front facing gables, (Min 4/12 -Max 6/12) roof pitch.
- Broad overhangs.
- Recessed and covered entries.
- Large porch areas wherever possible.

MATERIALS AND COLOURS

- Clad in siding/stucco in horizontal application.
- Traditional, rustic, and natural building materials like wood, stones, and bricks.
- Thick, structural masonry bases which are taken to the ground.
- Stone profiles suited are Mountain Ledge, Rustic Ledge, Cliffstone, and Bluffstone.
- Muted earth tones recommended. Monochromatic/tonal color schemes can be used.
- Secondary materials feature straight-edge shakes, panels, metal wood tone products.

- Detailed eaves with broad overhangs Brackets, exposed beams, blocks and braces under gables timber, wood-stained finishes are encouraged.
- Large, expansive glazing, extensive raised trim work.
- Windows are vertical in orientation and ample with minimum 5/8" grills in traditional pattern.
- Panelled garage door, smooth slab garage door with simple windows.
- Straight-edge finishes (trims, columns, shakes) in contemporary approaches.
- Metal or wood trellis details are encouraged at entries.
- Less ornate, decorative application of materials and detailing in modern takes.










3 SITE PLANNING

The siting of buildings is critical to the design success not only of individual homes, but to the neighborhood. Side yard setbacks and staggering of houses on adjacent lots can provide for privacy, separation, improved landscaping features, and a welcoming streetscape. Builders are to choose home designs that are suited to all the attributes of the lot – as relative massing, siting and style will be of utmost importance in assuring each home compliments its neighbor and the subdivision.



3.2 HOUSE PLACEMENT & WIDTH

Builders are to choose home designs that are suited to all the attributes of the lot. Builders are to review all available information and ensure the proposed house considers the lot size, lot location, site grading and view potential. Additional considerations in house placement are:

- Houses are expected to fill the lot width appropriately.
- Avoid unnecessary use of retaining walls.
- To provide interesting and appropriate elevations in exposed locations.
- The house width must be within 2' of the respective building pocket. A maximum of a 2' offset of the garage including the upper floor to fill the pocket will be permitted on interior lots only.
- Additional discretion may be considered when reviewing the overall building form, level of detailing, and intended design.

3.3 SETBACKS

3.3.1 Front Setback

The developer's architectural consultant will monitor front setbacks at the preliminary review stage and adjust them at their discretion to achieve the site planning principles of Riverstead. Additional considerations may include:

- To create more interesting streetscapes, variety will be provided and required in the front setbacks along the street.
- Pie-lots will be sited with additional considerations building relationships are integral to ensure that adequate space is maintained for the front entries and landscaping components.
- Corner lots, as well as homes with more imposing upper floor massing or rooflines will require increased setbacks to reduce their dominance on the street.
- Rear and side yard setbacks will adhere to minimum bylaw standards set by the municipality of Edmonton.

PLEASE NOTE: All homes will be sited with preliminary approval and an appropriate setback for the lot and house type/massing will be determined (with the above in mind) and provided to the builder.

3.3.2 Driveways

Driveways must meet all City of Edmonton requirements particularly with regards to width. Additional considerations for driveways will be:

- Driveways are not to exceed the width of the garage on any lot and cannot be any narrower than the exterior dimensions of the garage.
- On pie-lots, driveways may be required to narrow to less than the width of the garage to avoid excessive concrete in the front yard and provide for landscaping development.
- Driveways with decorative borders of exposed aggregate, patterned concrete or pavers may be provided as an alternative to narrowing the driveway.

3.4 GRADING

Builders are to familiarize themselves with the engineering grade plan and ensure that drainage patterns are to be established on all lots that channel surface water away from the house on all sides and into adjacent drainage swales, storm water system and be aware of any lots that require roof leader connectors to storm mains.

- Lot grading must be in strict conformance with the approved grading plans.
- Variations should be absorbed within the building mass to minimize steep slopes and contrast between lots.
- All plot plans and stakeouts must be done by the designated surveyor.
- Downspouts are to be positioned to direct water away from the house.
- Attempts to artificially elevate the finished grade of a lot to raise the main floor level of a dwelling or any extensive re-grading to create a flat site on the existing topography, will not be allowed.
- A maximum of 5 risers, with and additional maximum of 2 risers (for a total of 7) will be allowable in Riverstead (at the discretion of the Architectural Coordinator).



PLEASE NOTE: Builders will be asked to properly plan ahead of time – with the use of multiple floor plan options and stair layouts – with the goal of integrating side entries and unique grading circumstances without compromising the architectural standards of the house. Builders will also be asked to consult Section 4.2 for what the expected adjustments might be in the event of added risers.

3.5 RETAINING WALLS

Builders are to choose houses that suit the lot grading and avoid unnecessary use of retaining walls. Any retaining walls should be designed with the following in mind:






- Retaining walls are the responsibility of the property owner and must not compromise the grading design and lot drainage.
- Failure to adhere to approved grades may result in the need for retaining walls.
- Builders are to self-resolve any grading disputes with adjacent properties.
- Any retaining wall exceeding 1m in height MUST be approved by a professional engineer and may require a development permit.
- Acceptable materials for retaining walls are:
 - Landscaping blocks (ie: Alan block).
 - Poured concrete with aggregate surface or strip form concrete.
 - Natural elements such as wood and wood products.

4 GENERAL REQUIREMENTS

4.1 BUILDING FORM AND MASSING

Architectural massing refers to the concept of arranging the volumes of a house in relation to each other and the streetscape. In general, all parts of the building should be designed with a sense of proportion to one another – and achieving this is the foundation for the overall design of the house. Some of the specific architectural controls that will be considered are:

- All homes will provide massing, articulation, roof forms, glazing patterns and proportions, and overall arrangement of volumes that are consistent with the chosen style of the house
- 2 storey box-on-box structures will not be permitted. Long, blank walls will not be permitted on any elevation with exposure.
- Front-drive garages should project no further than 15' (4.5m) past the front veranda (can include column and roofline) or front wall of the home. When this is not possible, extra treatment will be required on the sides of the garage wall (i.e additional masonry return and/or window).
- Massing may be adjusted to maintain building proportions and surface areas consistent with the style.

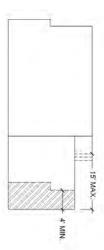

4.1.1 Additional Risers, Side Entry, and Massing

Increased risers – on account of a particular grading circumstance or to accommodate side entry - will require adjustments to the massing of the home to restore adequate proportions and scale to the architectural elements and to reduce the space above the garage roof. Adequate measures may vary case-by-case, but may include:

- Revisions to garage door height (8').
- Increased window depth.

- Increased application of material in specific locations to reduce overall mass of untreated space.
- Garage roof can be raised, garage slope can be increased but space between garage door and its roofline cannot exceed 24". Proportions are to be maintained.





7' garage door – elevation looks disproportionate applied

8' garage door – secondary material

4.1.2 3rd Storey Development

When adding a 3rd storey development, care must be taken to ensure this space does not overwhelm the structure. This may be accomplished by integrating 3rd floor space into the roof mass with the inclusion of dormers, lower fascia, and acceptable variation in wall planes.

Exterior deck space and balconies (as 3rd storey development) must be properly finished and carefully integrated into the existing roofline at the front. In all cases, any 3rd storey development must conform to municipal ordinances. To preserve the massing consistency along the street – the following additional requirements will be in place with 3-storey (single-family) product.



- The upper storey must be set back a minimum of 2' from the middle storey with a roofline bridging the 2 floors (with limited exceptions).
- Homes will be expected to decrease square footage each level up. This can be achieved using
 exterior space (patios) as well as the use of rooflines to lessen the massing, decrease the
 appearance of height, and add interest to the building form.
- When transitioning housing type (3-storey to 2-storey), rooflines will be monitored to ensure a smooth transition.

4.2 GARAGES

Garages must be designed to appear subordinate to the home and shall be integrated into the overall exterior design of the home as much as possible to reduce the domination on the streetscape.





4.2.1 Front Drive Product

Front drive product will include up to a 3 car garage as determined by housing type and located in accordance with the garage location plan. Considerations when designing this product will be:

- 2nd storey massing over garages must be setback a minimum of 48" from the front of the garage to ensure the massing will not overpower the streetscape. Discretion may be used in cases of exceptional and intentional design with additional design elements applied to lessen the impact of the massing. These homes will require an increased front setback.
- Builder shall subscribe the garage integration measures outlined in section 4.1, where the
 entry is brought forward. Front-drive garages should project no further than 15' (4.5m)
 past the front veranda (can include column and roofline) or front wall of the home. When
 this is not possible, extra treatment will be required on the sides of the garage wall (i.e
 additional masonry return and/or window).
- Garage column minimums will be dictated by the width of the lot. In all cases, 18" will be the minimum width required unless the lot size does not permit.

4.1.1 Triple Car Garages (Front Facing)

Triple car garages are permitted on lots where the minimum house width is 32' or above. This must be carefully coordinated with existing street furniture while maintaining a strong home design in which the garage if properly integrated into the overall design of the house.

For front-facing triple car garages, the minimum house width and design requirements are as follows:

- Entry 5'.
- Single Garage 10' 1 column.
- Double Garage 19' 2 columns 18".
- Garage columns on the outward-facing garage to be a minimum of 18" in width.
- Pie shaped lots will be reviewed on a lot-by-lot basis if an exception is required.

PLEASE NOTE: When trying to achieve appropriate proportions with garage column width, to accommodate the above proportions, builders will be required to shift the garage door on the secondary, recessed garage towards the middle. This adjustment will maintain adequate proportions for the garage. Primary garage columns will not be accepted with less than 18" width. See attached imagery.



4.1.1 Side Drive Configuration

All side driveways are to be designed to minimize the amount of concrete in the front yard. To achieve these aims, the following guideline requirements will be in place:

- Side driveway entrances must taper the approach to a recommended 3m at the entrance driveway approaches cannot extend out past the outline of the garage.
- When side driveway entrances border an adjacent side drive entrance, builders will be required to provide a minimum 6" recess from the property line to create separation between the 2 driveways, which is to be filled with permeable materials to allow for proper drainage, allow for height differences, and to present a distinct border in between the lots. See provided sketch 3.1.1.a.
- Landscaping features (see image 3.1.1.a) can be used to provide this recess and space between the 2 driveways Image 3.1.1.b.

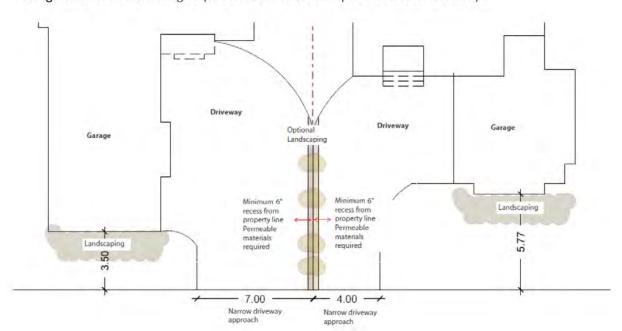


Image 3.1.1.a Sketch showing required recess to create space between driveways.

4.2 REPETITION

To ensure suitable variety of all streetscapes, houses of the same or similar design and detailing will be separated. Between similar house designs a minimum of 2 lots on either side and a minimum of 2 lots each way across the street is required.

4.2.1 Repetition and Colors

To further ensure homes offer an element of distinction on streetscapes separation will be required between color schemes. Between similar color schemes there must be a minimum of 2 houses between when on the same side of the street and a minimum of 2 houses between when on the opposite side of the street.







Houses with significant differences in architectural style and design may be permitted, at the consultant's discretion, to have similar color schemes in closer proximity than is typical Architectural Design.

4.3 PARGING

Parging details on exposed elevations will vary depending on the applied material and its intent. The rules to follow are:

- All masonry is to be properly grounded, parged to within 2" of exposed grade on all applications. (image 4.4.a).
- Exposed concrete and parging will be restricted to a maximum of 12" at all elevations.
- All other elevations (non-exposed) will be restricted to 2'.
- Garage columns if finished in an alternate material are to adhere to the same standards as masonry application either with the garage column material itself or with an alternative horizontal trim cap detail (image 4.4.b).





Image 4.4.a

Image 4.4.b

4.4 SPECIAL DESIGN CONSIDERATION

High visibility locations abutting parks, trails, stormwater management facilities, streets, parks, and green spaces require special design consideration. Sales and design teams are asked to refer to the phase marketing map to confirm lots with a high exposure designation. The level of treatment for exposed sides and rears will increase depending on the type of product under review. Estate and Semi-Estate will have appropriate, elevated standards.

4.4.1 Corner Lots

Special design consideration is required with a higher standard applied for lots on, or visible from collector roadways. Flanking side elevation on corner lots must have full front elevation treatment. Specifically, it will be expected that these elevations have:

• Roof forms that match the front and provide variety to the rear streetscape.

- Increased level of detailing including finishes, materials, trims, and features applied in a manner consistent to the front elevation and style of the home.
- Relief in wall plane is required (jogs/box outs) and/or roof lines between 1st and 2nd floor.
- Architectural features chimneys, dormers, entries – that provide interest and articulation to the exposed side elevation.
- Appropriate roof overhangs.



Homes with high exposure elevations to the rear will require detailing on the exposed elevations and must include:

- Roof forms that match the front and provide variety to the rear streetscape.
- Adequate articulation in the form of variation in wall planes, projections, exterior space (decks) and horizontal elements to break up large areas of untreated space. Clear threestorey elevations and large exposed flat walls will not be permitted.
- Increased level of detailing including finishes, materials, trims, and features applied in a manner consistent to the front elevation and style of the home.
- Completed construction of all building elements. Exposed decks including walk-out lots and those which are exposed (due to chain link fencing) must be finished at the time of construction and all parts of the deck must be fully finished according to the specifications of final approval documents.

4.4.3 Medium Exposure

Medium visibility locations (identified on the map) will refer to homes in which the lower level of the home is concealed by a solid wood screen fence, or the specific location of the lot is not proximate to major collector roads and/or amenity areas. These elevations will require a similar amount of treatment with an emphasis on the exposed upper floor only and **will not** require a deck to be built at the time of construction.







- Roof forms that match the front and provide variety to the rear streetscape.
- Increased level of detailing including finishes, materials, trims, and features applied in a manner consistent to the front elevation and style of the home. Emphasis on the upper floor ONLY.
- Relief in wall plane is required (jogs/box outs). While Medium Exposure homes will have less articulation required, 2 storey flat massing will not be permitted.
- Deck not required to be built concurrent with construction.



4.4.4 Exterior Decks

At minimum, all walk-out decks will require:

- Supporting columns are to be built out to a minimum of 12"x12" extending from grade to the underside of deck.
- Cap and base of the columns must be architecturally detailed and built out according to style.
- Underside of the deck must be finished with aluminum, wood, or a composite soffit.
- Handrails must be finished in pre-finished aluminum, glass, or metal construction; wood railings will not be permitted.
- The main beam and rim joist must be clad in smartboard or an approved equivalent. All vertical, exposed surfaces of the deck must be fully finished – painted to match the colour scheme of the house.
- Non-walkout decks which are not concealed by any fencing are to be fully enclosed. Finishing materials will be consistent with the secondary materials applied to the house – panels and trim, masonry, and other materials as requested. Lattice is not permitted.
- Masonry will be required on all exposed V2 and V3 lots to be used on the columns.
- Second floor rear decks may be considered if it designed in such a way that the deck is inset and does not project pass the remaining house massing on the second floor. Approvals of 2nd storey decks will be at the discretion of the architectural coordinator.

5 DESIGN ELEMENTS

5.1 ROOF DESIGN & PITCH

Roof designs, pitches, and overhangs should reflect the massing of the chosen architecture style whenever possible. On contemporary homes, flat and shed roof elements will be highly encouraged. Other considerations when designing roof structures are:

- Exaggerated overhangs (to the front) and/or thickened fascia will be encouraged when suited to the style and design submitted.
- Flat roofed accent areas will be encouraged.
- Homes on zero lot lines will be restricted to 1'-0" eaves on side yard overhangs. Builders will be required to apply standard overhangs (dictated by style) to all front elevations and exposed rear elevations.

5.2 FRONT ENTRIES

The front entry of a home is an integral element of the overall design and is expected to be a focal point of the front elevation and/or exposed side elevation.

- Front entries are to be visible from the street.
- Entries are to be fully defined achieved either by recession into the house or with suitable roofline distinction. Flat, angle roof lines, beams and trellises are acceptable and recommended accents to create interest at the entry.
- Angled entries will be permitted provided they are enhanced with strong features identifying the entry.



5.2.1 Porches, Front Steps, and Risers

Front porches will be encouraged when suited to the style of the home and present an integral feature of the overall exterior. To maintain the design standards of the community, front porches are recommended to be:

- Finished in smooth concrete with simple smooth or masonry columns and metal, glass, or no railings.
- Bases of all porches must be closed in and finished in an appropriate solid material.
- Wood entry steps will only be permitted when a porch is included as an integral part of the
 design. Wood steps, if accepted, must be finished with all vertical, exposed surfaces painted
 to match the color of the home. Railings will not be permitted to be constructed with wood.

5.2.2 Front Doors

The entry door will be the final detail in creating distinction and exemplifying the style persona. Builders are encouraged to get inspiration from the architectural style of your home. Entry door color may make a personal statement but must be painted. Additional considerations:

- Glazing, sidelights, and/or transom windows are encouraged.
- Real wood or fiberglass doors stained (a wood colour) are encouraged.
- Bolder, accent colors are encouraged.







White front doors are not acceptable.

5.3 RAILING

Railing will be required as per the Alberta Building Code. Front porches and rear decks should have railings in a style to match the architectural theme. Modern style metal and glass railings are preferred on all architectural styles on both front and rear elevations. Acceptable railing materials include:

- Aluminum
- Wrought Iron
- Glass Panel

PLEASE NOTE: Railings constructed of wood will not be permitted.

5.4 COLUMNS

Entrances can be justly enhanced with feature columns that add to the overall expression. All column design is expected to properly suit and express the chosen architectural style. Other considerations when designing columns for the entry are:

- All columns are to be designed in a modernized version suited to the style of the home these columns may include smooth finishes, simple square cap and base details, metal trim or finish.
- All columns must be well suited to the style and appear to have structural integrity. Smaller columns will be considered when proportionate to the entry of the home.
- Metal and Wood tone products are acceptable as a column finish.
- Timber columns are acceptable (and encouraged) but must be stained or finished appropriately and be suitable for the chosen style.

5.5 WINDOWS

Window layouts and sizes are very important to fully achieve the characteristics of a particular architectural style. Larger expanses of glass will establish the strength of the style and more unusual configurations will provide interest and excitement. All exteriors are to address windows in a significant manner with the following considerations:

- Window styles, sizes and groupings should be proportionate to the wall space available and specific designs should adhere to the chosen Architectural style.
- Acceptable window frame materials are:
 - Prefinished metal clad. (Required for V3 product)
 - Vinyl clad windows.
- All windows grilles must be external simulated divided lights (SDL'S).
- Darker window frames are encouraged on most styles and will be required with lighter color schemes. Non-white window frames may be used to increase the level of interest and detailing at the discretion of the architectural coordinator.





5.6 PROJECTIONS/CHIMNEYS

Chimneys & box-outs provide interest on the exterior of a home. To ensure that they are treated as integral elements chimneys and box-outs must:

- Be finished to match the exterior wall material or suitable complementary finish.
- Extend down to grade in all exposed locations.
- All projections are recommended to provide a distinct break in color/material and to be finished in upgraded materials.

5.7 GARAGE DOORS

Garage door style and finishes must be designed to be an integral element of the overall style of the home and must be appropriate to the chosen style of the home. Some considerations when selecting a garage door:

- Doors are not to exceed 8' in height and 20' in width.
- Windows are permitted and glazing panels in unique configurations are preferred.
- The garage door is to be maintained in a colour that matches the predominant siding colour, the trim colour, or is an acceptable complimentary colour.
- Upgraded styles and finishes (wood tone) when properly suited to the style are encouraged.

6 MATERIALS & COLOURS

6.1 MATERIALS

Riverstead is promoting long-term sustainability of the exteriors of all homes throughout the area with its insistence of maintenance free materials. The use of materials that provide prefinished surfaces that retain their integrity is encouraged.

6.1.1 Primary Wall Materials

Composite siding (Hardie plank or equivalent) or smooth finish acrylic stucco will be the standard in Phase 52 of Riverstead. Vinyl siding or stucco in a standard, knock-down finish will not be permitted. In all cases, materials that are chosen are to reflect the architectural style, any alternate





cladding materials need to be submitted review. Additional standards to material application are lot specific and can be reviewed in section 2.1.

V1 (Block 6, Lots 1-19)

*Vinyl will be permitted exclusively on non-exposed elevations (as a colour match)

V2 & V3 (Block 5, Lots 20-38) (Block 7, Lots 1-30) (Block 8, Lots 2-13) (Block 14, Lots 19-25)

6.1.2 Secondary Wall Materials

Premium secondary wall materials and colours in adequate quantity are required on the front and exposed elevations of every home and will be specified in the provided style guides. Builders are to refer to Style Guides in section 4.0 for specific requirements of secondary materials.

6.2 MASONRY

Masonry will be required on all V2 and V3 houses in Riverstead. The amount of stone or brick – in addition to the profile chosen – will be dependent on the architectural style of the home being built. Additional requirements for masonry will include:

- All masonry must sit proud of the transition material to achieve the required definition.
- All masonry must be applied to portions reflecting structural integrity. Floating masonry sections will not be permitted.
- All masonry is to be taken to grade (within 2") in all cases.
- Masonry is encouraged to return to the entry from the face of garage. Stone or brick may drop to porch height after the minimum 2' return.
- For V3 (Estate Product) masonry will be required in large quantities covering 150 square feet on exposed elevations.

6.3 TRIM, FASCIA, AND SOFFIT

To ensure the clean, neat aspect of all the architectural styles is fully complemented, trim work must meet the following requirements:

- Acceptable trim materials are smartboard, wood, or raised acrylic stucco. Aluminum trim will not be permitted.
- Trim must extrude or sit proud of the wall material (0.5").
- Homes with modern expressions may not require window trims providing windows suit wall space without and are of adequate size.
- Eavestrough colours are to match the fascia colour.
- Rainware must be limited on exposed elevations. Downspouts should take place on side and rear elevations of homes only.
- Soffits may be prefinished metal wood tone products or finishes are encouraged.

^{*}Composite materials ONLY. Vinyl not permitted at all.

6.3 BUTTRESS WALLS

Extended wall projections common in the Nordic style must be finished in a manner that provides for a consistent and strong detail in the community. The following will be expected:

- Fascia on the upper gable and exterior walls must be composite smartboard.
- All components of the buttress wall including interior and exterior wrap must be finished in the same colour and material as the gable to create a continuous, monochromatic, and uniform detail.
- Soffit may be aluminum but must be a colour match to the buttress wall.
- Buttress walls must have a minimum width of 8" and project a minimum of 1'. Materials must return full to interior wall face and must wrap to the exterior the distance equal to the projection of the buttress wall. (Ex. If the buttress wall projects 1', wrap to the exterior must be a minimum of 1') Alternate proportions will be considered for review, if the overall aims of the style are met.
- Buttress walls can be removed in favor of a zero-overhang approach which emphasizes the simplicity in form.





6.4 COLOURS

Colours are an integral element in reinforcing the design style and vision for the community of Riverstead and will reflect the materials, finishes, and colors appropriate to the specific architectural style. All colour submissions will be reviewed on an individual basis and alternative colours will be recommended when necessary to create and maintain rich, diverse, blended streetscapes. Other considerations will be:

- Repetition of colour schemes will be monitored to ensure pleasing variety is achieved.
- Roof colours throughout the community will be limited to darker colours in shades of grey, brown, and black.
- Predominantly white or light colour schemes require black windows.
- Entry door color may make a personal statement but must be compatible with the overall color scheme of the house. White front doors will not be acceptable.





 Garage doors are to be painted to match the siding colour or an acceptable complimentary colour. Upgraded garage doors with wood finishes or full glazing will be encouraged – but also reviewed on a case-by-case basis.

7 ADDITIONAL REQUIREMENTS

7.1 SHOWHOMES

Show Homes are integral to the successful adoption of new communities. Builders are required to identify show homes on their submissions and reviews will be completed comprehensively for all builders before any approvals are released. This will ensure diversity amongst builder product but will also provide for continuity and cohesiveness.

 Showhomes are at the sole discretion of the developer and no builder is allowed to own or operate a showhome without prior written authorization from Cantiro.

7.2 SUBDIVISION APPEARANCE

7.2.1 Signage

To maintain cohesiveness for signage within the subdivision, all signage will be supplied by the Developer. No builder signage is allowed on private lots without the prior written authorization of Cantiro. The City of Edmonton required signage for the identification of builder permit information would be an exception.

7.2.2 Excavation Material

Builders must ensure that all excavation is kept within the confines of their lot. Any spillage on a road, land, sidewalk or neighboring lot must be removed immediately or the Developer will arrange for its removal and invoice for expenses.

7.2.3 Clean Up

Builders should encourage timely removal by all subtrades of litter on building sites. Failure to comply will result in a clean-up bill being charged to the lot. Supply of bins by the Builder is MANDATORY. Any general clean-up of the subdivision initiated by Cantiro can and will be charged pro-rata to all builders.

7.2.4 Satellite Dishes and Recreational Vehicles

Satellite dishes or antennas are strictly prohibited. Recreational vehicles may not be parked in front of any residence for longer than 72 hours.

8 LANDSCAPING

Landscaping is an integral feature to every part of the site and can speak to the vibrancy and quality of a development. Landscaping design should tie the entire site together, define entryways and pathways, identify private space, and buffer parking garages and less desirable views.

8.1 GENERAL REQUIREMENTS

The following guidelines are encouraged within the landscaping design for all lots:

- All homeowners will be required to follow the city of Edmonton landscape bylaw requirements. In the case of a discrepancy, the higher standard will apply.
- Incorporate sustainable, low maintenance landscaping that minimizes requirements for potable
 water use, manufactured fertilizers, and pesticides. Design the site to minimize use of potable
 water for irrigation; encouraging seasonal rainfall for sustainability of plant species or use captured
 rainwater for irrigation. Xeriscaping design is encouraged.
- Incorporate variety in layout and proportions of hard surface, lawn, and shrub bed areas to promote diversity of landscaping across adjacent lots.
- Include food producing trees and shrubs within landscaping designs.
- Incorporate vertical gardening, or use of trellises, arbours or other tall elements, in concert with vines and tall narrow plant material, particularly for landscaping of narrow spaces.
- Use permeable materials such as permeable concrete unit pavers, "grass pave" pavers, stone, cobblestone, brick or their equivalent for hard surface pedestrian path areas.
- Where space permits, integrate planting beds around building foundations to soften the edges of buildings. Perimeter plantings are also encouraged to screen adjoining properties and soften the appearance of fencing.
- Where space permits, plant the area between adjacent driveways with low shrubs or groundcover.
- All plant material is recommended to be selected from the list of plants attached as Appendix A, comprised of native and drought tolerant plant species. Use of native plants has advantages over use of "exotic" species as native plants are well adapted to the local climate and soil conditions, and generally require less maintenance to establish and thrive. Use of native species also provides additional habitat for the birds, butterflies, insects and other creatures that depend on them. A native landscape incorporating a wide range of plant forms and species (trees, shrubs, grasses and forbs) should generally be more genetically diverse than a typical ornamental landscape and should be more resistant to disease.
- Artificial turf is allowed as a replacement for sod.

8.2 DESIGN REQUIREMENTS

All landscaping design requirements are applicable to ALL lots and shall be provided in accordance with the below Figure 1:

LANDSCAPING REQUIREMENTS FOR ALL LOT TYPES

- 1.1.1.1.1 Landscaping the front yard of each lot as per these guidelines;
- 1.1.1.1.2 Providing topsoil in the rear yard of each lot;
- 1.1.1.1.3 Landscaping the side yard flanking public roadway on corner lots; and
- 1.1.1.2 Homeowners are responsible for the installation of all landscaping not described in Section 1.1.1.1 for their respective homes (rear and side yard landscaping).





- 1.1.1.3 Homeowners of Single Detached Front Drive 2-car Garage Product are responsible for ALL landscaping as described in these guidelines for their respective homes. A landscaping deposit is required for all lots of this product type.
- 1.1.1.4 The total area of sod shall not exceed 50% of the total front yard landscaped area. The remaining area should be comprised of planting beds, naturalized landscaping or xeriscaping, gardens, trees, or other soft landscape components. Rock gardens may also be appropriate but cannot be used exclusively as a low-maintenance approach. A pedestrian path or hard landscape may be included in the remaining 50%, but not with the intent of comprising the entire remaining 50%.
- 1.1.1.5 It is preferred that all planting beds are mulched with 75mm depth ground tree mulch or equivalent to limit weed growth and reduce evaporation. However, rock planting beds will also be accepted, but not used exclusively.
- 1.1.1.6 Boulevard trees and sod shall be protected at all times during construction. Builders must install a temporary protective fence around the existing trees, at or beyond the nearest trees' drip line. Builders are responsible for the erection and maintenance of temporary protective fencing. Protective fencing must remain during the entire construction process and only be removed when all construction is completed. Builders must ensure that adequate measures are in place to protect trees from damage during the construction period.

Figure 1: Landscaping – All Lots and All Lot Types

8.3 MINIMUM REQUIREMENTS

All Homes in Riverstead must follow the City of Edmonton landscape guidelines for minimum trees/shrubs.

- Homes with Site width less than 8.0m minimum <u>front yard</u> requirements of sod or artificial turf, and one tree or four shrubs
- Homes with Site width 8.0 15.0m minimum <u>front yard</u> requirements of sod or artificial turf, and one tree and six shrubs.
- Homes with Site width greater than 15.0m minimum <u>front yard</u> requirements of sod or artificial turf, and one tree and eight shrubs.

8.3.1 Minimum Plant Sizes and Ratio

New trees and shrubs must comply with the following:

- Deciduous trees must have a min. caliper of 50mm.
- Decidous shrubs must have a min. height of 300mm (5 gallon pot).
- Coniferous trees must have a min. height of 300mm of 2m.
- Coniferous shrubs must have a min. spread of 450mm (5 gallon pot).
- Proportion of deciduous to coniferous trees and shrubs must aim for 50:50.





(Image 1.1.8.4a – Edging Detail)

(Image 1.1.8.4b – Edging Detail)

8.4 FENCING

Fencing is an essential element in community design as it defines ownership and allows for screening and privacy.

8.4.1 Requirements, Typical Lots

- Fencing on lots other than where provided is the responsibility of the Purchaser to construct. Maintenance of all fencing is the sole responsibility of the Purchaser.
- All fencing within the neighbourhood shall be constructed in accordance with the fence details for wood screen fencing, chain link fencing and decorative steel fencing provided in **Appendix** B.
- Fencing for typical lots shall be designed as shown in Figure 2: Fencing Plan Typical Lots, with
 1.5 m wood screen fencing along the rear and side yards. Fencing height may be reduced to 1.2 m along the length of the house structure.






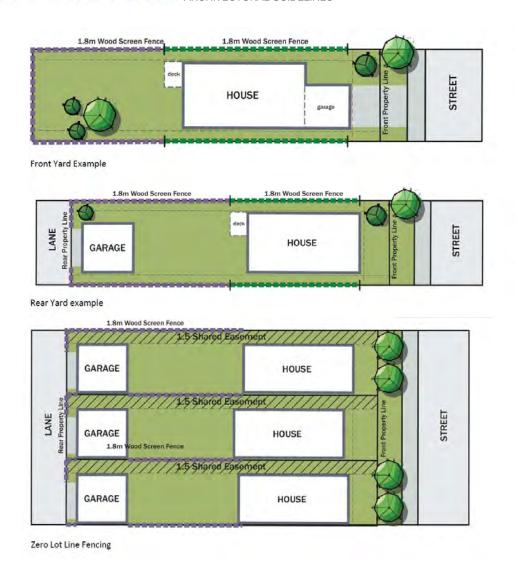


Figure 2: Fencing Plan – Typical Lots

8.4.1 Requirements for Amenity Lots

Fencing for all lots backing onto the storm water management facility, neighborhood open spaces and major walkways shall be designed as shown in **Figure 3: Fencing Plan – Stormwater Management Facility, and Neighborhood Parks and Walkway Lots**. On the side property line, 1.2 m or 1.5 m wood screen fencing is required along the length of the house up to the end limit of the rear deck. Further back from the rear deck, the side yard fence shall be 1.2 m chain link fencing, or optional decorative steel.

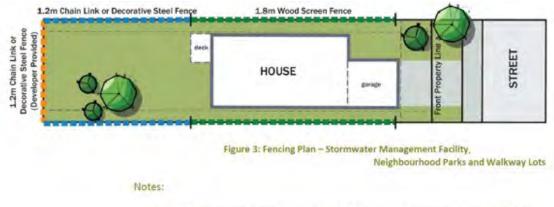

- All landscaping shown is conceptual. Refer to landscape requirements within this document
- All wood screen, chain link, and decorative steel fencing must be constructed in accordance with the fence details provided in appendix B

Figure 3: Fencing Plan – Stormwater Management Facility, Neighborhood Parks, and Walkway Lots

9 PROCESS OF APPROVAL/CONSTRUCTION

The following process will be followed for submissions for architectural approval in Riverstead

9.1 REVIEW

The Purchaser shall review all lot information, marketing material and the Guidelines prior to choosing a lot.

9.2 SUBMISSION PROCESS

All submissions for architectural approval will be submitted online through the Streetscape Lot Management System. Access to Streetscape is available by invitation only and every user on the system must belong to a Group. There are several types of Groups on Streetscape, each with their own special set of features and view of information. Some types of Groups include:

- Builder
- Developer
- Consultant

If your Group is already setup, then you are ready to Request Access. If you don't yet have a Group – then you can contact us directly to have one setup and request the orientation package.

Go Package: Basic Orientation

Streetscape for Builders





Contact information can be found online at www.e2.associates or in the directory found on page 1 of this document.

9.3 SITE CHECK

The Purchaser is responsible for checking the site itself, legal plan of survey, plot plan and title to the Lands for locations of:

- Light standards
- Bus zones
- Fire hydrants
- Utility right of ways or easements for drainage
- Catch basins
- Communication pedestals
- Transformer boxes or utility pull boxes
- Restrictive covenants
- Super mailboxes

or other items which may affect the house design, impact its siting or the size or location of the driveway and report all problems to the Architectural Consultant in writing.

9.4 APPROVAL SERVICES

The review process of the Developer's consultant is designed to assist the builder group in their product development and sales by offering a flexible range of service options. Below is a quick summary of each service.

9.4.1 Portfolio Review

The Portfolio Review service provides a path for the builder to have a pre-approved inventory of housing product to be distributed to sales teams – allowing for efficiency, cost-certainty, and a more streamlined approach to getting a final approval.

How it works: Prior to committing to the purchase of any lots within the community the purchaser/builder is encouraged to submit examples of their product line and exterior designs to the consultant for review to determine the compatibility of the builder's product with the architectural vision and guidelines for the community. Utilizing the PortfolioPLUS module within the Streetscape Lot Management System the builder can submit either preliminary sketches or complete working drawings to receive individual, general comments on the suitability of each of their proposed elevations.

9.4.2 Pre-Approval

The pre-approval process allows the builder to initiate the sales process or spec home build without finalized information and is the most efficient way to gain approval. The developer strongly recommends that preliminary approval submissions be made for each lot to avoid the unnecessary expense of revised drawings and/or client disappointment.

How it works: Builders submit for pre-approval as a pre-approval request in Streetscape. An architectural coordinator will review the product with reference to the published Architectural Guidelines ensuring that:

- Submitted house design is acceptable for the lot and meets all requirements elevation suitability, repetition concerns, adequate level of interest and detailing.
- Footprint of the house is suitable for the lot and meets all requirements house size, width, massing considerations and setback requirements.

Minimum Requirements: While the builder is encouraged to submit as much information as possible – the minimum requirements necessary to complete this type of review are:

- A Portfolio approved model name (indicated on the request form)

 OR
- A front elevation paired with a floor plan/foundation plan done to the specified scale showing all exterior dimensions.

PLEASE NOTE: As part of the pre-approval service, the consultant will provide a preliminary plot (with both siting and grading recommendations) with a prescribed front setback that is suitable to the submitted massing of the house, its relationship on the street, and compliant with staggered setback requirements that are set out in the guidelines.

Next steps: A preliminary review will be published on Streetscape – including working drawings, preliminary plot plan, and a color form (if requested) – identifying clearly what will be expected to gain final approval. This will be presented in the form of design comments, suggested revisions, siting/grading comments, and any material or color comments (if submitted as part of the review) Builder is required to address these comments (or provide alternative solutions) and re-submit for final approval.

9.4.3 Final Approval

With reference to the preliminary review, the Purchaser shall submit online the following to the Architectural Consultant for final approval - Professionally drawn working drawings in pdf format:

- FULL WORKING DRAWING SET (All 4 elevations, floor plans, foundation plans, crosssection).
- Plot Plan complete with proposed grades.
- Final Approval Form completed with materials and colours.

To ensure that builders/purchasers can proceed to the next steps, submissions requiring minor modifications/revisions may be completed as a Final Approval (with Conditions) with **required changes** identified as a condition for the approval. Drawings may be re-uploaded onto the lot record, but the builder has the option of proceeding with the marked up (and stamped) drawings. Submissions coming straight to final that require more consequential changes will be sent back to the builder and dropped to a pre-approval (pending revisions and re-upload for final approval).





PLEASE NOTE: Upon return of "the Architectural Approval" the Purchaser is responsible for checking all information including the approved plans, plot plans, grades and final approval form and contacting the consultant with any concerns or discrepancies.

9.4.4 Final Approval (Without Preliminary)

The preliminary review process is highly recommended – but not required.

Builders/purchasers who wish to bypass the preliminary approval and come straight for final approval must provide the submission requirements listed in section 8.5. Additional considerations when submitting for Final Approval (without Preliminary review) are:

- The elevation/model must be Portfolio reviewed OR
- Additional diligence has been taken in the part of the purchaser/builder to ensure that the
 model is acceptable for final approval. This would entail a comprehensive review and
 compliance with all architectural guidelines, high exposure designations, conflict consideration,
 and complete list of acceptable colors and materials.
- Consideration of the front setback models with overpowering massing will require increased front setbacks.

Submissions requiring minor modifications/revisions may be completed as a Final Approval (with Conditions) with **required changes** identified as a condition for the approval.

Submissions coming straight to final that require more consequential changes will be completed as a pre-approval.

9.4.5 Revisions

The Purchaser shall contact the Design Consultant through Streetscape and obtain written approval for any revisions to the architectural approval before the revisions are applied. Charges for revisions after Final Approval are subject to a **fee charged directly to the builder.**

9.5 BUILDING PERMIT

The Purchaser shall apply for a building permit from the appropriate authority.

9.6 SURVEYOR STAKEOUT

When the approved plans are finalized and approved by the Architectural Consultant, the Purchaser may proceed to stakeout the property.

9.7 FINAL LOT INSPECTION

Return of the Architectural and Landscaping deposit will be released to the builder upon satisfactory completion of the house as per the architectural approval. Upon completion of the house, the builder will submit an approved, stamped, grading certificate and the municipal letter of acceptance from the City of Edmonton to initiate a Final Inspection of the home (including landscaping). Homes must be fully complete with all seasonal work done and driveway installed.

9.7.1 Lot Inspection Submission Requirements

The Builder/Property Owner will be responsible for damages to infrastructure servicing and amenities on and surrounding the lot. Accordingly, each Builder/Property Owner shall inspect the condition of curbs, sidewalks, streetlights, services, etc. on his lot and must submit written notice of any damages to the Developer within 7 days of purchasing the lot, otherwise costs for repairing any damages becomes the sole responsibility of the Builder/Property Owner. Upon entering into a sales agreement for the lot, a thorough inspection should be undertaken to include the following items. A copy of the inspection report is attached hereto as Appendix C.

- Curb Stop Water Valve
- Sidewalks, curbs, and gutters
- Driveways, aprons, and asphalt
- Boulevard landscaping/trees
- · Communication Pedestal
- Light Standards
- · Fire Hydrants
- Drainage grass/concrete swales
- Fencing
- Entrance Features

9.7.2 Architectural and Landscaping Inspection Submission Requirements

To initiate an architectural inspection and return of the deposit, all construction must be completed - exterior and landscaping completed in accordance with these guidelines AND as per the house plan approval. Architectural and landscaping inspection requests are to be consolidated into one request and will not be reviewed separately. The following will be required to be completed:

- Final grading completed.
- Final grading certificates and approved grading inspection report.
- Water valve exposed and marked.
- Sidewalks, street, gutter and curbs in clean condition.
- Electronic request to E2 & Associates to conduct the architectural and landscape inspection.

PLEASE NOTE: The request must include a comprehensive photo inspection (of the architectural and landscaping components) **Builder is to consult Photo Inspection Success Guide** located in the Streetscape Library for specific requirements. This document library will house all required forms, inspection policy documents, and resources (success guides) - if further information is required.

Next Steps: Once the final inspection is complete, a report will be sent to the Developer. The Builder will be notified of any architectural and landscaping deficiencies and will be given a time frame in which to correct the deficiencies.





9.8 RETURN OF DEPOSITS

Upon receipt of an approved final inspection, all builders/property owners must contact the Developer for release of the Architectural and Landscaping Deposit.

DIRECTORY

Developer: Cantiro Communities Ltd.

17515 - 108 Street

Edmonton, Alberta T5S 1G2 Phone: (780) 784-4389 Contact: Carlin Gurjar

Architectural Consultant: E2 & Associates

700 2nd Street SW (Floor 19) Calgary, Alberta T2P 2W2 Phone: (403) 256-5123 Contact: Stefan Bieber

Surveyor: PALS Geomatics

10704 176 Street NW

Edmonton, Alberta T5S 1G7

Geotechnical Consultants: CT and Associates Engineering

14420 116 NW

Edmonton, AB T5M 4B4 Phone: 780-451-1332

APPENDIX A: RECOMMENDED NATIVE PLANTS

BOTANICAL NAME	COMMON NAME	Mature Height *meters
Coniferous Trees		
Picea glauca	White Spruce	15
Picea mariana	Black Spruce	15
Pseudotsuga menziesii glauca	Douglas Fir	12
Pinus banksiana	Jack Pine	12
Pinus cembra	Swiss Stone Pine	10
Pinus contorta latifolia	Lodgepole Pine	12
Larix laricina	Tamarack	10
Larix sibirica	Siberian Larch	12

BOTANICAL NAME	COMMON NAME	Mature Height *meters
Deciduous Trees		
Betula papyrifera	Paper Birch	12
Celtis occidentalis	Hackberry	10
Crataegus arnoldiana	Arnold Hawthorn	4
Crataegus mordenensis "Snowbird"	Snowbird Hawthorn	4
Crataegus mordenensis "Toba"	Toba Hawthorn	3
Eleagnus angustifolia	Russian Olive	7
Fraxinus pennsylvanica "Patmore"	Patmore Ash	12
Malus adstringens 'Kelsey"	Kelsey Crabapple	4
Malus adstringens 'Royalty"	Royalty Crabapple	5
Malus adstringens 'Strathmore"	Strathmore Crabapple	5
Malus adstringens 'Thunderchild"	Thunderchild Crabapple	
Malus bacata	Siberian Crabapple	
Populus balsamifera	Balsam Poplar	20
Populus tremuloides	Trembling Aspen	20
Prunus nigra	Canada Plum	5
Prunus pensylvanica	Pincherry	5
Prunus virginiana "Schubert"	Schubert Chockcherry	5
Prunus virginiana melanocarpa	Blach Chokecherry	5
Pyrus ussuriensis	Ussurian Pear	8
Quercus marcrocarpa	Bur Oad	20
Sorbus americana	Mountain Ash	8
Syringa reticulate "Ivory Silk"	Japanese Tree Lilac	5






BOTANICAL NAME	COMMON NAME
Coniferous Shrubs	
Juniperus communis	Common Juniper
Juniperus chinensis var. (Blue Pfitzer, Gold Coast, Golden Pfizer Juniper,	Chinese Juniper
Old Gold	
Juniperus horizontalis var. (Plumosa, Hughes, Bar Harbor, Blue Carpet,	Creeping Juniper
Blue Rug)	
Juniperus horizontalis "Blue Carpet"	Blue Carpet Juniper
Juniperus sabina var. (Arcadian, Broadmoor, Calgary Carpet, Skandia)	Savin Juniper
Pinus mugo	Mugo Pine
Pinus mugo "Pumilio"	Dwarf Mugo Pine

BOTANICAL NAME	COMMON NAME
Deciduous Shrubs	
Amelanchier alnifolia	Saskatoon
Arctostaphylos uva-ursi	Bearberry
Caragana pygmaea	Pygmy Caragana
Caragana arborescens var. pendula	Weeping Caragana
Caragana arborescens "Lorbergi"	Walker's Weeping Caragana
Cornus stolonifera	Red Osier Dogwood
Corylus cornuta	Beaked Hazelnut
Eleagnus commutate	Wold Willow
Sorbaria sorbifolia	Falsespirea
Genista pilosa	Genista
Hippophae rhamnoides	Sea Buckthorn
Ledum groenlundicum	Labrador Tea
Lonicera edulisvar. kamtschatica (Berry Smart Blue, Berry Smart Belle,	Sweetberry Honeysuckle
Cinderella)	
Linicera tartarica "Arnold Red"	Tartarian honeysuckle
Physocarpus opulifolius	Golden Ninebark
Potentilla fruticosa var. (Abbotswood, Goldfinger, Pink Beauty)	Potentilla
Prunus cerassus 'Evans'	Evans Sour Cherry
Prunus tomentosa	Nanking Cherry
Ribes alpinum	Alpine Currant
Ribes oxyacanthoides	Gooseberry
Ribes nigrum	Black Currant
Ribes rubrum	Red Lake Currant
Rosa acicularis	Prickly Rose
Rosa rugosa var. (Adelaide Hoodless, Blanc Double de Coubert, Dart's	Rugosa Rose
Dash Pink, Fimbriata, Hansa, Marie Bugnet, Therese Bugnet)	
Rosa woodsii	Common Rose
Rubrus	Wild Raspberry
Salix purpurea	Arctic Willow
Sambucas racemosa	Red Elder

Shepherdia argentea	Thorny Buffaloberry
Shepherdia canadensis	Buffaloberry
Syringa x hyacinthiflora	American hybrid Lilac
Syringa meyeri "Palabin"	Dwarf Korean Lilac
Syringa patula "Miss Kim"	Manchurian Lilac
Syringa vulagaris (Beauty of Moscow, Belle de Nancy, Charles Joly,	Common lilac
Katharine Havemeyer, Madame Lemoine, Sensation)	
Syringa x chinensis	Chinese Lilac
Symphoricarpos alba	Snowberry
Viburnum opulus "Nanum"	Dwarf European Cranberry
Viburnum trilobum	Highbush Cranberry
Viburnum trilobum "Bailey's Compact"	Dwarf Highbush Cranberry


APPENDIX B: FENCE DETAILS

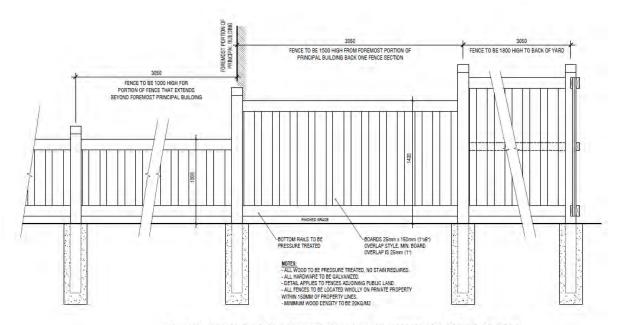

OVERLAP BOARD WOOD SCREEN STEP DOWN FENCE SCALE: NTS





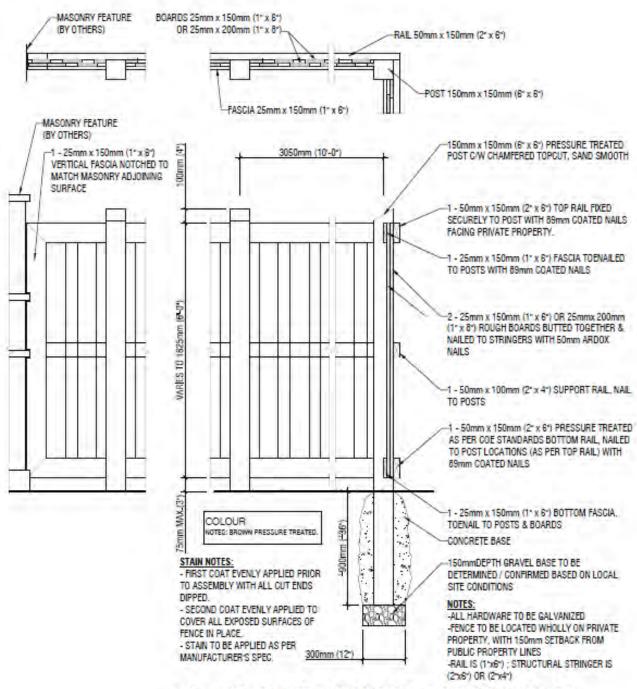

1.8m HT. OVERLAP WOOD SCREEN FENCE

APPENDIX C: HIGH VISIBILITY MAP



V1 (Block 6, Lots 1-19)

*Vinyl will be permitted exclusively on non-exposed elevations (as a colour match)

V2 & V3 (Block 5, Lots 20-38)

(Block 7, Lots 1-30)

(Block 8, Lots 2-13)

(Block 14, Lots 19-25)

*Composite materials ONLY. Vinyl not permitted at all.



